



**Door Phone Solutions**  
Analog / Hybrid / SIP / GSM

REF 029013

REF 029023

REF 029043




### SLIM DOOR PHONE

The Slim Door Phone, is easy to install both outdoors and indoors. There are 3 models, with 1, 2 and 4 buttons. It is simple to connect to any PBX FxS port as well as to a PSTN line.

- ❖ Very SLIM, only 16 mm
- ❖ Compatible with LINK BOX GAP DECT allows a wireless connection to any proprietary GAP DECT base
- ❖ Local configuration via supplied software and remotely by DTMF code.

REF 029020

REF 029019

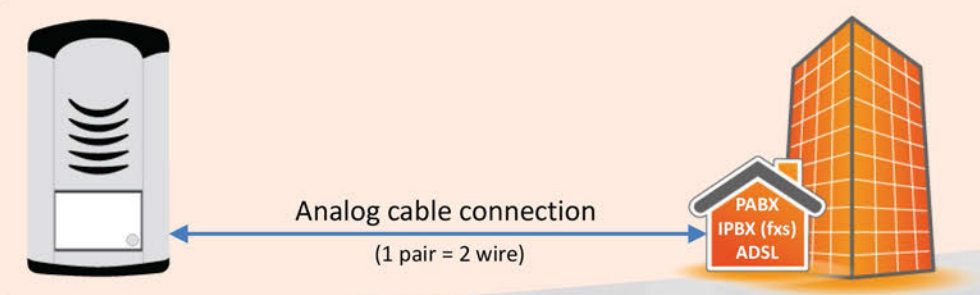


### SMILE DOOR PHONE

Via the USB programming interface and Windows software supplied, the Link Smile Door Phone is very easy to configure. It is simple to connect to any PBX FxS port as well as to a PSTN line.

- ❖ 1 relay for lock control
- ❖ Outdoor and indoor installation
- ❖ Compatible with LINK BOX GAP DECT allowing a wireless connection to any proprietary GAP DECT base
- ❖ Flash/ Pause/ Speaker volume/ Tone programmable
- ❖ Remote configuration by DTMF

Available in Emergency Call Colour "Red"

REF 029600

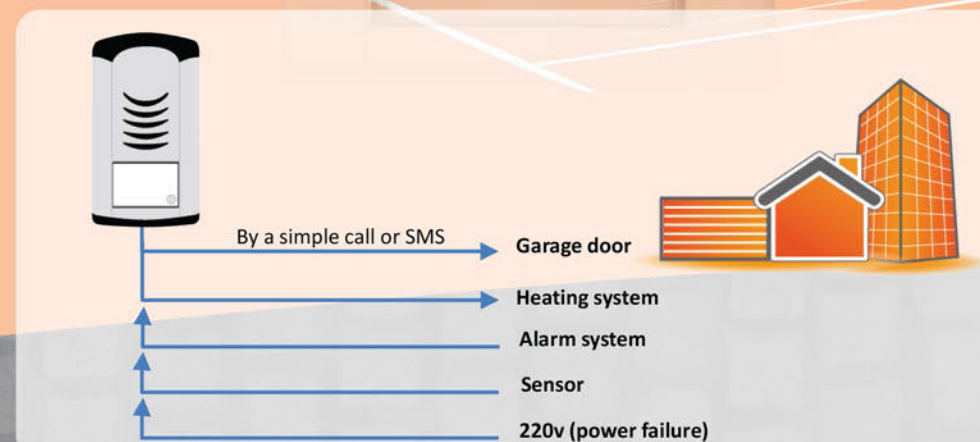

### GSM DOOR PHONE

The Link GSM Door Phone, calls you, on a Mobil or PSTN phone and lets you talk to your visitor and quickly open a door by dialing a 2 to 4 Digits DTMF code. As well as using it as a Door phone, you can also take remote control of your Garage Door and turn any device On & Off by SMS. You will be also alerted when your alarm and sensor has detected an Alert.

- ❖ 2 Input Relays for ALARM and Sensor Alert
- ❖ 2 Output Relays for Garage Door and Heater Control
- ❖ Notifications of any alarm and power failure by SMS
- ❖ Battery in case of Power failure (Option)

REF 029034

REF 029031

REF 029033


























The NEW LINKCOM IP DOOR PHONE Manager Application can be downloaded onto a smartphone or a tablet to control the entire LINKCOM IP Door phone range.

### Link Slim IP Video Door Phone

This NEW generation of IP Door phones is based on the SIP protocol and can connect easily to your IP network. Only a single cable (Cat 5/ 6) is required for audio, video, data and also Power to the Door phone (POE).

It is certified by ALCATEL & AASTRA and compatible with most IPBX manufacturers, Asterisk and SIP Phones. In addition to Voice, the IP LINK DOOR PHONE can broadcast video streams to IP phones and softphones, supporting video, PC's, Smartphones and Tablets via LINK POPUP or LINK DOOR MANAGER software. The IP LINK DOOR Phone allows greater flexibility and integration.



Type		Analog				Hybrid				IP / SIP				GSM
														
Designation		Link Slim Door Phone	Link Smile Door Phone	Link Door Phone	Link Door Phone Vandal resistant	Link Slim IP Door Phone	Link Slim IP Door Phone Vandal resistant	Link IP Door Phone	Link IP Door Phone Vandal resistant	Link GSM Door Phone				
Connection	FXS port PSTN Line													
	LAN RJ45													
Button number	GSM (option)	GSM Gateway Link Gate A+	GSM Gateway Link Gate A+	For IP camera PGSM Gateway Link Gate A+ 1 to 64	For IP camera GSM Gateway Link Gate A+ 1 to 64	Voice in SIP, IP camera GSM Gateway Link Gate SIP 2	Voice in SIP, IP camera GSM Gateway Link Gate SIP 1	Voice in SIP, IP camera GSM Gateway Link Gate SIP 1 to 64	Voice in SIP, IP camera GSM Gateway Link Gate SIP 1 to 64					
		1, 2 or 4	1			2	1	1 to 64	1 to 64	1				
Programming	PC software													
	DTMF													
Additional modules / Options	WEB				(IP camera)									
	Flush mounting													
	Surface mounting													
	Vandal resistant													
	Video													
Power	Keypad													
	Vigix													
	Screws Vandal resist.													
	Amplifier		Option											
	Programming cable		(Voice)	(Voice)	(Voice)	(Voice)								
Number of relays	Analog line													
	POE													
Indoor mounting	12V Power supply													
		1												
Outdoor mounting														
		1												
Dimensions (mm)														
		104 x 153 x 16	185 x 99 x 40	Configuration according		185 x 99 x 40	185 x 99 x 40	Configuration according		185 x 99 x 40				
Compatibility		All PBX and PSTN line				Alcatel OXE/OXO, Aastra, Cisco, Asterisk, Panasonic...				All GSM operator				
Home automation functions (see page 4)														



Find our full Door phone range as well as our other products on  
**www.linkcom.fr**  
 or directly scanning the flashcode

### LINK SIP DOOR PHONE




### Simple, modular and evolutionary (Common features on the 3 models)

The LINK DOOR PHONE modular range in Aluminum or Vandal resistant casing, allows up to 50 different configurations, via modules from 1 to 64 buttons, IP Camera, Digital Keyboard, amplified speaker and badge reader.

Via 2 relays the LINK DOOR PHONE is compatible with Electrical and Magnetic locks.

A windows based PC software is provided for easy configuration.

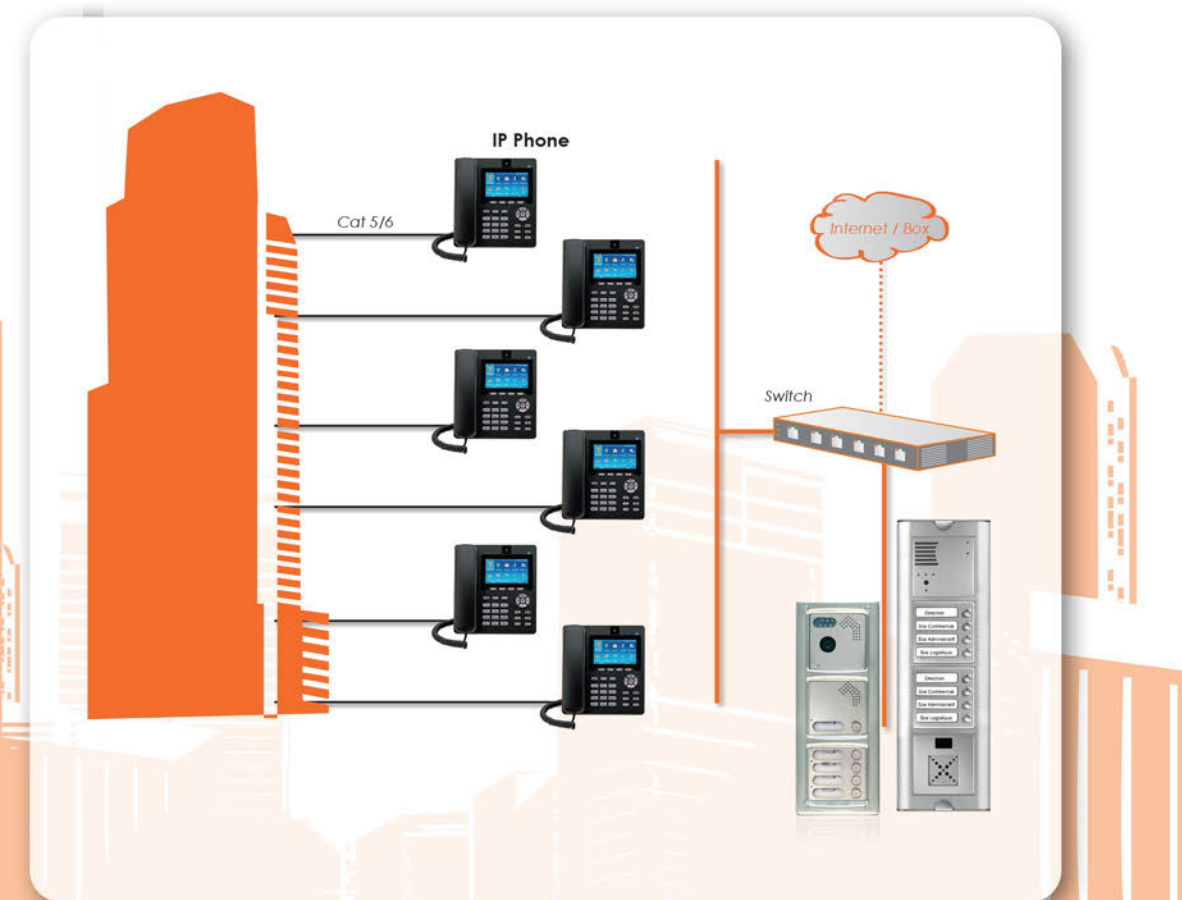

## Link Door Phone


Analogue and Hybrid version

- Can connect to any PBX FxS port or PSTN line for voice and LAN for image (IP Camera).
- Compatible with LINK BOX GAP DECT to allows a wireless connection to any proprietary GAP DECT base.
- Allows easy PC configuration and Remote programming by the DTMF LINK DP Pc software provided.

## LINK SIP DOOR PHONE

The LINKCOM IP SIP DOOR PHONE, naturally connects to your IP network. Only a single cable (Cat 5/ 6) is required for audio, video, data and also to power the Door phone (POE).

Dedicated LINK POPUP and LINK DOOR MANAGER software allows you to answer and view visitors via your PC, Smartphone or tablet.

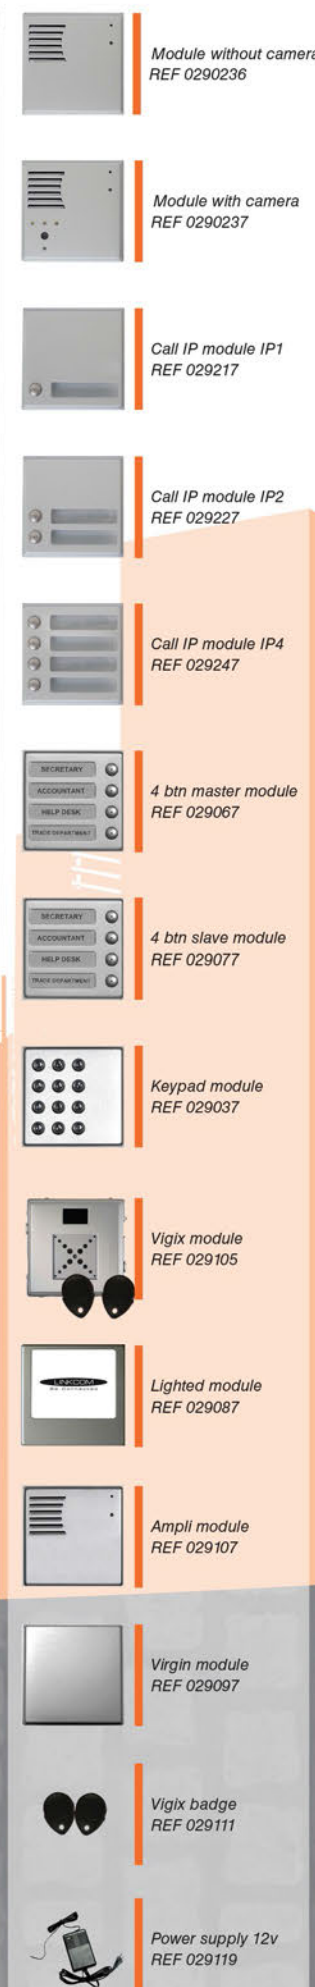

### LINK DOOR PHONE

